




PRODUCT TECHNICAL DATA SHEET

Issued: February 2020

Catalogue Reference:	AN59 SL BA	
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS	
General Description:	SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL Single Channel/Square Front. Supplied with Castellated PVC Infill. Infill colour options: Black, White, Light Grey, Flint, Granite, Rustic, Fawn, Ivory, Spruce, Jade, Regency, Mid Blue, Nimbus, Peat, Yellow, Poppy, Claret, Porth Stone, Polar Grey. <div>Castellated Infill SRVs: PTV Dry - 85 PTV Wet - 76</div>	
Specifications:	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
	Tread Dimension	59mm
	Nosing Dimension	30mm
	Gauge	2.5mm
	Lengths available	Cut to customer sizes up to 2700mm
	Finish	Black Anodised
	Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill. Drilled for size 6 screws. Fixings not supplied.
Application:	For abutting to LVT and Vinyl to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available.	
Suitability:	For stairs with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.	
Additional Information:	Also available with ATI49.5 Tread Insert for an all-aluminium installation and Olympic Grip carborundum infill for exterior/wet applications.	

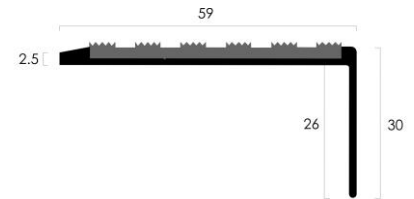

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com